


Pop Perçin / Örümcek | Bombe Kafa

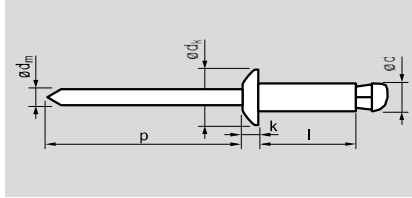

Alüminyum
Parlatılmış

Çelik
Çinko Kaplama

Ölçülendirme						Kuvvet	
Ø d	l		Ø d _k	k	Ø d _m	p	
[mm]	[+1/-0,2]	[mm]	[mm]	[mm]	[mm]	[mm]	Kopma[N]
3,2	8,0	0,5-1,0	6,5 [+/-0,2]	1,0 +/-0,1	~1,80	≥27	750
[+/-0,15]	10,0	1,0-3,0					
Ø [3,5 min]	12,0	3,0-5,0					
[3,7 max]	16,0	7,0-9,0					
	18,0	9,0-11,0					
4,0	10,0	1,5-5,0	8,0 [+/-0,4]	1,2 [+/-0,2]	~2,10	≥27	1.140
[+/-0,15]	12,0	4,0-6,5					
Ø [4,3 min]	14,0	6,0-9,0					
[4,5 max]	16,0	8,0-11,0					
	20,0	10,0-13,0					
4,8	10,0	1,5-4,0	9,0 [+/-0,4]	1,4 +/-0,2	~2,70	≥27	2.450
[+/-0,15]	12,0	2,0-6,0					
Ø [5,2 min]	14,0	4,0-8,0					
[5,3 max]	16,0	6,0-10,0					
	18,0	8,0-12,0					
	20,0	10,0-14,0					
	22,0	12,0-16,0					
	25,0	16,0-19,0					
	30,0	19,0-24,0					
	35,0	24,0-29,0					
	40,0	29,0-34,0					

* Daha fazla bilgi için lütfen bize ulaşın. info@atabaglanti.com.tr

www.atabaglanti.com.tr