


Pop Perçin / Standart | Havşa Kafa

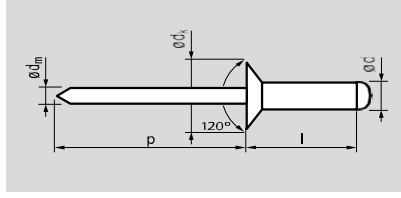

Alüminyum
Parlatılmış

Çelik
Çinko Kaplama

Ölçülendirme						Kuvvet		
Ø d	l [+1/-0,2]		Ø d _k	k	Ø d _m	p		
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	Kopma[N]	Kesme[N]
2,4	6,0	2,0-4,0	5,0 [+0/-0,4]	-	~1,45	≥27	355	315
[+0,08/-0,10]	8,0	4,0-6,0						
	10,0	6,0-8,0						
Ø 2,5								
3,0	6,0	1,5-3,5	6,0 [+0/-0,4]	-	~1,75	≥27	810	620
[+0,08/-0,10]	8,0	3,5-5,5						
	10,0	5,5-7,5						
Ø 3,1	12,0	7,5-9,5						
3,2	6,0	1,5-3,5	6,0 [+0/-0,4]	-	~1,75	≥27	980	760
[+0,08/-0,10]	8,0	3,5-5,5						
	10,0	5,5-7,5						
Ø 3,3	12,0	7,5-9,5						
	14,0	9,5-11,5						
4,0	6,0	1,5-3,0	7,5 [+0/-0,5]	-	~2,10	≥27	1.600	1.200
[+0,08/-0,15]	8,0	3,0-5,0						
	10,0	5,0-6,5						
	12,0	6,5-8,6						
	14,0	8,5-10,5						
	16,0	10,5-12,5						
4,8	8,0	3,0-4,5	9,0 [+0/-0,5]	-	~2,70	≥27	2.230	1.690
[+0,08/-0,15]	10,0	4,5-6,0						
	12,0	6,0-8,0						
	14,0	8,0-10,0						
	16,0	10,0-12,0						
	18,0	12,0-14,0						
	20,0	14,0-16,0						
	25,0	18,0-21,0						
5,0	8,0	3,0-4,5	9,0 [+0/-0,5]	-	~2,70	≥27	2.500	2.000
[+0,08/-0,15]	10,0	4,5-6,0						
	12,0	6,0-8,0						
	14,0	8,0-10,0						
	16,0	10,0-12,0						
	18,0	12,0-14,0						
	21,0	14,0-17,0						
	25,0	17,0-20,0						

* Daha fazla bilgi için lütfen bize ulaşın. info@atabaglanti.com.tr

www.atabaglanti.com.tr