


Pop Perçin / Yivli | Bombe Kafa

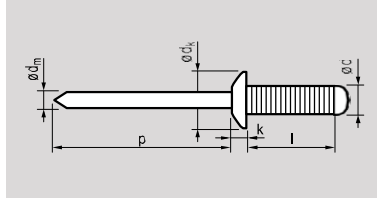

Alüminyum[AlMg3,5]
Parlatılmış

Çelik
Çinko Kaplama

Ölçülendirme						Kuvvet	
Ø d	l		Ø d _k	k	Ø d _m	p	
[mm]	[+1/-0,2]	[mm]	[mm]	[mm]	[mm]	[mm]	Kopma[N]
3,2	10,0	Max. 6,0	6,0 [+/-0,24]	≤1,4	~1,80	≥27	930
[+0,35/-0]	14,0	Max.10,0					
Ø 3,4							
4,0	8,0	Max. 4,0	8,0 [+/-0,29]	≤1,7	~2,20	≥27	1.410
[+0,35/-0]	10,0	Max. 6,0					
Ø 4,3	12,0	Max. 8,0					
	16,0	Max.12,0	9,5 [+/-0,29]	≤2,0	~2,65	≥27	1.575
4,8	8,0	Max. 4,0					
[+0,35/-0]	10,0	Max. 6,0					
Ø 5,1	11,0	Max. 7,0					
	12,0	Max. 8,0					
	14,0	Max.10,0					
	16,0	Max.12,0					
	18,0	Max.14,0					
	20,0	Max.16,0					
	25,0	Max. 21,0					
	30,0	Max. 26,0					

* Daha fazla bilgi için lütfen bize ulaşın. info@atabaglanti.com.tr

www.atabaglanti.com.tr